

DIGITAL INDICATORS FOR BORE GAGES




- Specially designed for bore gages
- The minimum value tracking function can find the diameter automatically
- Read the diameter directly, after inputting the size of setting ring
- Reading in digital and analog
- Display can be rotated by 320°
- Button function: minimum value tracking, calibration, data preset, inch/metric conversion, absolute/incremental measurement (not for 2108-10FQ/2108-101FQ)
- Data remains after power off, no need to recalibrate after power on
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable, backs (page 164~165), contact points (page 161~163), spindle lift knob (code 7332)

DATA OUTPUT THE ORIGINAL DATA REMAINS AFTER POWER OFF



press the button to transmit data
data transmission signal light


INSPECTION CERTIFICATE
TRACEABLE TO NIST

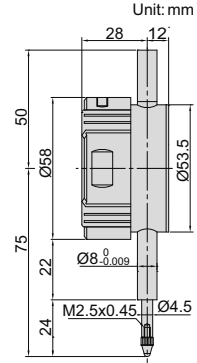

Code	Range	Resolution	Accuracy	Hysteresis	Remark
2108-10F *	12.7mm/0.5"	0.002mm/0.0001" (can switch to: 0.01mm/0.0005")	20µm	10µm	flat back
2108-101F *	12.7mm/0.5"	0.001mm/0.00005"	5µm	2µm	flat back

With transmit button and light

Code	Range	Resolution	Accuracy	Hysteresis	Remark
2108-10FQ*	12.7mm/0.5"	0.002mm/0.0001" (can switch to: 0.01mm/0.0005")	20µm	10µm	flat back
2108-101FQ*	12.7mm/0.5"	0.001mm/0.00005"	5µm	2µm	flat back

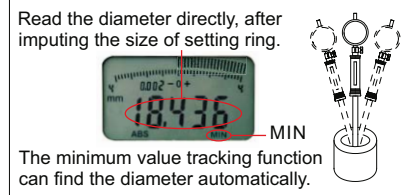

* Supplied with manufacturer inspection certificate traceable to NIST USA