



**M**

**ISO metric coarse threads DIN 13**





- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

► Carbide tap can increase tool life longer than HSS taps due to higher hardness. Suitable for hardened steels (HRc50~60)

► VHM-Gewindebohrer ermöglichen aufgrund ihrer höheren Härte bessere Standzeiten als HSS-Gewindebohrer. Geeignet für gehärtete Stähle (HRc50~60)



**Hole type**  
2.0×D

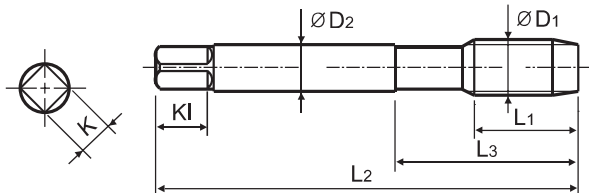

Material groups: **HR** CARBIDE DIN 371/376 6HX 60° C TiCN

Machine taps  
Maschinengewindebohrer

Recommended Cutting Page : P.201

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	TiCN	L1	L2	L3	ØD2	K	KI	Z	Ød1
M3	× 0.5	T0997206TIC	11	56	18	3.5	2.7	6	4	2.55
M4	× 0.7	T0997246TIC	13	63	21	4.5	3.4	6	4	3.4
M5	× 0.8	T0997286TIC	15	70	25	6	4.9	8	4	4.3
M6	× 1	T0997316TIC	17	80	30	6	4.9	8	5	5.1
M8	× 1.25	T0997366TIC	20	90	35	8	6.2	9	5	6.9
M10	× 1.5	T0997426TIC	22	100	39	10	8	11	5	8.6
M12	× 1.75	T0997506TIC	24	110	—	9	7	12	5	10.4
M14	× 2	T0997546TIC	26	110	—	11	9	12	6	12.2
M16	× 2	T0997606TIC	27	110	—	12	9	12	6	14.2
M18	× 2.5	T0997656TIC	30	125	—	14	11	14	6	15.7
M20	× 2.5	T0997706TIC	32	140	—	16	12	15	6	17.7

►DIN 371(M3~M10) and DIN 376(M12~M20)

◎ : Excellent ○ : Good

ISO Material Description	P					M				K											
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended									○												
ISO Material Description	N					S							H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																		◎	◎	◎	◎

					T0997-TIC	T0999-TIC	TC313 TB313 TY313	TC283 TY283
ISO	VDI 3323	Material Description	HB	HRc	Vc (m/min)			
<b>P</b>	1	Non-alloy steel	125					
	2		190	13				
	3		250	25				
	4		270	28				
	5		300	32				
	6	Low alloy steel	180	10				
	7		275	29		10-15	10-15	
	8		300	32		6-10	6-10	
	9		350	38	5-8	5-8	3-5	3-5
	10	High alloyed steel, and tool steel	200	15				
	11		325	35				
<b>M</b>	12	Stainless steel	200	15				
	13		240	23				
	14		180	10		4-6	4-6	
<b>K</b>	15	Grey cast iron	180	10				
	16		260	26				
	17	Nodular cast iron	160	3				
	18		250	25				
	19	Malleable cast iron	130					
20	230		21					
<b>N</b>	21	Aluminum-wrought alloy	60					
	22		100					
	23	Aluminum-cast, alloyed	75					
	24		90					
	25		130					
	26		110			25-35	25-35	
	27		90					
	28	Copper and Copper Alloys (Bronze / Brass)	100					
	29							
	30	Non Metallic Materials						
<b>S</b>	31	Heat Resistant Super Alloys	200	15				
	32		280	30				
	33		250	25				
	34		350	38				
	35		320	34				
	36	Titanium Alloys	400 Rm					
	37		1050 Rm					
<b>H</b>	38	Hardened steel	550	55	3-7	3-7		
	39		630	60	3-7	3-7		
	40	Chilled Cast Iron	400	42	3-7	3-7		
	41	Hardened Cast Iron	550	55	3-7	3-7		

THREAD MILLS

SYNCHRO TAPS

COMBO TAPS

YG TAP GENERAL

YG TAP STEEL

YG TAP HARDENED

YG TAP INOX

YG TAP CAST IRON

YG TAP ALU

YG TAP Ti Ni

YG TAP FORMING

NUT TAPS

STI TAPS

PIPE TAPS

TECHNICAL DATA