




M

Solid Carbide Thread Mill for ISO Metric Internal Thread - DIN 13


- VOLLHARTMETALL GEWINDEFÄHRER für ISO METRISCHES INNENGEWINDE - DIN 13
- FRAISES A FILETER CARBURE MONOBLOC POUR FILETAGE ISO INTER MÉTRIQUE - DIN13
- Filettature interne, ISO metriche, passo grosso - DIN 13

► Easy to cut threads even for exotic materials like Nickel, Titanium and their alloys.

► Problemloses Gewindeschneiden sogar in exotischen Werkstoffen, wie Nickel, Titan und ihre Legierungen.

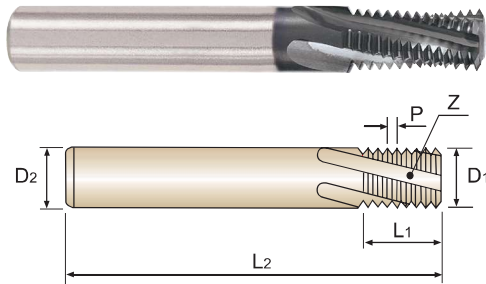

Thread Depth
2×D



Recommended Cutting Page : P.59

Unit : mm

EDP No.	Nominal Diameter [D]	Pitch P	Cutter Diameter D1	Shank Diameter D2	Thread Length L1	Overall Length L2	No. of Flute Z
L1211200	M3	0.5	2.2	6	5	57	3
L1211240	M4	0.7	2.9	6	7	57	3
L1211280	M5	0.8	3.8	6	8	57	3
L1211310	M6	1.0	4.5	6	13	57	3
L1211360	M8	1.25	6.0	6	17.5	65	3
L1211420	M10	1.5	7.5	8	21	72	4
L1211500	M12	1.75	9.5	10	26.25	80	4
L1211540	M14	2.0	10.0	10	30	83	4
L1211600	M16	2.0	12.0	12	34	92	4
L1211650	M18	2.5	14.0	14	37.5	92	5
L1211700	M20	2.5	16.0	16	42.5	105	5

* Other coatings are available on your request

◎ : Excellent ○ : Good

ISO	P										M				K											
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
HRc	125	130	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	200	250	300	350	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S							H								
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	550	600	650	700	750
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



THREAD MILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDKONDITIONEN

ISO	VDI 3323	Material Description	HB	HRc	L1211	L1212	L1213	L1214	L4211	L4212	L6215
					Vc (m/min)						
P	1	Non-alloy steel	125		80-120	80-120	80-120	80-120	80-120	80-120	80-120
	2		190	13	80-120	80-120	80-120	80-120	80-120	80-120	80-120
	3		250	25	80-120	80-120	80-120	80-120	80-120	80-120	80-120
	4		270	28	80-120	80-120	80-120	80-120	80-120	80-120	80-120
	5		300	32	80-120	80-120	80-120	80-120	80-120	80-120	80-120
	6	Low alloy steel	180	10	80-120	80-120	80-120	80-120	80-120	80-120	80-120
	7		275	29	80-120	80-120	80-120	80-120	80-120	80-120	80-120
	8		300	32	80-120	80-120	80-120	80-120	80-120	80-120	80-120
	9		350	38	80-120	80-120	80-120	80-120	80-120	80-120	80-120
	10		High alloyed steel, and tool steel	200	15	80-120	80-120	80-120	80-120	80-120	80-120
	11	325		35	80-120	80-120	80-120	80-120	80-120	80-120	80-120
M	12	Stainless steel	200	15	40-80	40-80	40-80	40-80	40-80	40-80	40-80
	13		240	23	40-80	40-80	40-80	40-80	40-80	40-80	40-80
	14		180	10	40-80	40-80	40-80	40-80	40-80	40-80	40-80
K	15	Grey cast iron	180	10	50-100	50-100	50-100	50-100	50-100	50-100	50-100
	16		260	26	50-100	50-100	50-100	50-100	50-100	50-100	50-100
	17	Nodular cast iron	160	3	50-100	50-100	50-100	50-100	50-100	50-100	50-100
	18		250	25	50-100	50-100	50-100	50-100	50-100	50-100	50-100
	19	Malleable cast iron	130		50-100	50-100	50-100	50-100	50-100	50-100	50-100
20	230		21	50-100	50-100	50-100	50-100	50-100	50-100	50-100	
N	21	Aluminum-wrought alloy	60		100-300	100-300	100-300	100-300	100-300	100-300	100-300
	22		100		100-300	100-300	100-300	100-300	100-300	100-300	100-300
	23	Aluminum-cast, alloyed	75		100-300	100-300	100-300	100-300	100-300	100-300	100-300
	24		90		100-300	100-300	100-300	100-300	100-300	100-300	100-300
	25		130		100-300	100-300	100-300	100-300	100-300	100-300	100-300
	26		110		100-300	100-300	100-300	100-300	100-300	100-300	100-300
	27	Copper and Copper Alloys (Bronze / Brass)	90		100-300	100-300	100-300	100-300	100-300	100-300	100-300
	28		100		100-300	100-300	100-300	100-300	100-300	100-300	100-300
	29				100-300	100-300	100-300	100-300	100-300	100-300	100-300
	30	Non Metallic Materials			100-300	100-300	100-300	100-300	100-300	100-300	100-300
S	31	Heat Resistant Super Alloys	200	15	20-60	20-60	20-60	20-60	20-60	20-60	20-60
	32		280	30	20-60	20-60	20-60	20-60	20-60	20-60	20-60
	33		250	25	20-60	20-60	20-60	20-60	20-60	20-60	20-60
	34		350	38	20-60	20-60	20-60	20-60	20-60	20-60	20-60
	35		320	34	20-60	20-60	20-60	20-60	20-60	20-60	20-60
	36	Titanium Alloys	400 Rm		20-60	20-60	20-60	20-60	20-60	20-60	20-60
	37		1050 Rm		20-60	20-60	20-60	20-60	20-60	20-60	20-60
H	38	Hardened steel	550	55							
	39		630	60							
	40	Chilled Cast Iron	400	42							
	41	Hardened Cast Iron	550	55							