

# YG DREAM DRILLS - FLAT BOTTOM

## DH450 SERIES


### CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG

- VHM, DREAM DRILLS - FLACHBOHRER
- DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC
- PUNTE IN MD DREAM DRILLS, TESTA PIANA

- KURZ
- LONGUE
- LUNGA

- ▶ For holes on various angled surfaces.
- ▶ 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- ▶ Optimized flute shape for excellent chip evacuation.
- ▶ High strength cutting edge to improve tool life and versatility drilling.
- ▶ For through holes, minimized burrs at entrance and exit when drilling thin plate.
- ▶ CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- ▶ Pilot Drilling for 5XD

- ▶ Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- ▶ Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- ▶ Optimierte Nutenform für hervorragende Spanabfuhr.
- ▶ Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- ▶ Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- ▶ VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel mit Kühlkanalbohrungen
- ▶ Pilotbohren 5XD

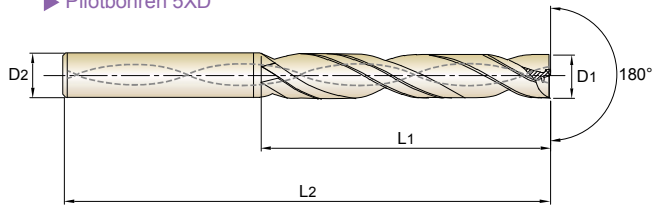

P.117

5 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450030	3.0	6	28	66
DH450031	3.1	6	28	66
DH450032	3.2	6	28	66
DH450033	3.3	6	28	66
DH450034	3.4	6	28	66
DH450035	3.5	6	28	66
DH450036	3.6	6	28	66
DH450037	3.7	6	28	66
DH450038	3.8	6	36	74
DH450039	3.9	6	36	74
DH450040	4.0	6	36	74
DH450041	4.1	6	36	74
DH450042	4.2	6	36	74
DH450043	4.3	6	36	74
DH450044	4.4	6	36	74
DH450045	4.5	6	36	74
DH450046	4.6	6	36	74
DH450047	4.7	6	36	74
DH450048	4.8	6	44	82
DH450049	4.9	6	44	82
DH450050	5.0	6	44	82
DH450051	5.1	6	44	82

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450052	5.2	6	44	82
DH450053	5.3	6	44	82
DH450054	5.4	6	44	82
DH450055	5.5	6	44	82
DH450056	5.6	6	44	82
DH450057	5.7	6	44	82
DH450058	5.8	6	44	82
DH450059	5.9	6	44	82
DH450060	6.0	6	44	82
DH450061	6.1	8	53	91
DH450062	6.2	8	53	91
DH450063	6.3	8	53	91
DH450064	6.4	8	53	91
DH450065	6.5	8	53	91
DH450066	6.6	8	53	91
DH450067	6.7	8	53	91
DH450068	6.8	8	53	91
DH450069	6.9	8	53	91
DH450070	7.0	8	53	91
DH450071	7.1	8	53	91
DH450072	7.2	8	53	91
DH450073	7.3	8	53	91

▶ Other diameters and shank types are available upon request.

▶ NEXT PAGE

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	23	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	⊙	⊙	⊙	○	○	⊙	○	○	○		○				⊙	○				

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			



# DREAM DRILLS - FLAT BOTTOM

**DH450** SERIES


## CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG

- 🇩🇪 VHM, DREAM DRILLS - FLACHBOHRER
- 🇫🇷 DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC
- 🇮🇹 PUNTE IN MD DREAM DRILLS, TESTA PIANA

**KURZ**  
**LONGUE**  
**LUNGA**

- ▶ For holes on various angled surfaces.
- ▶ 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- ▶ Optimized flute shape for excellent chip evacuation.
- ▶ High strength cutting edge to improve tool life and versatility drilling.
- ▶ For through holes, minimized burrs at entrance and exit when drilling thin plate.
- ▶ CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- ▶ Pilot Drilling for 5XD

- ▶ Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- ▶ Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- ▶ Optimierte Nutenform für hervorragende Spanabfuhr.
- ▶ Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- ▶ Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- ▶ VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel mit Kühlkanalbohrungen
- ▶ Pilotbohren 5XD

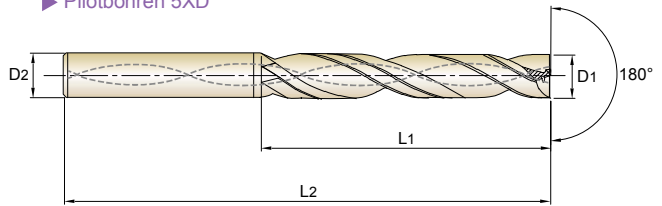

CARBIDE
30°
h6
h7
180°
20 bar
P.117

5 x D

Unit : mm									
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TIAIN	D1	D2	L1	L2	TIAIN	D1	D2	L1	L2
DH450074	7.4	8	53	91	DH450096	9.6	10	61	103
DH450075	7.5	8	53	91	DH450097	9.7	10	61	103
DH450076	7.6	8	53	91	DH450098	9.8	10	61	103
DH450077	7.7	8	53	91	DH450099	9.9	10	61	103
DH450078	7.8	8	53	91	DH450100	10.0	10	61	103
DH450079	7.9	8	53	91	DH450102	10.2	12	71	118
DH450080	8.0	8	53	91	DH450105	10.5	12	71	118
DH450081	8.1	10	61	103	DH450108	10.8	12	71	118
DH450082	8.2	10	61	103	DH450110	11.0	12	71	118
DH450083	8.3	10	61	103	DH450115	11.5	12	71	118
DH450084	8.4	10	61	103	DH450118	11.8	12	71	118
DH450085	8.5	10	61	103	DH450119	11.9	12	71	118
DH450086	8.6	10	61	103	DH450120	12.0	12	71	118
DH450087	8.7	10	61	103	DH450125	12.5	14	77	124
DH450088	8.8	10	61	103	DH450130	13.0	14	77	124
DH450089	8.9	10	61	103	DH450135	13.5	14	77	124
DH450090	9.0	10	61	103	DH450140	14.0	14	77	124
DH450091	9.1	10	61	103	DH450145	14.5	16	83	133
DH450092	9.2	10	61	103	DH450150	15.0	16	83	133
DH450093	9.3	10	61	103	DH450155	15.5	16	83	133
DH450094	9.4	10	61	103	DH450160	16.0	16	83	133
DH450095	9.5	10	61	103	DH450165	16.5	18	93	143

▶ Other diameters and shank types are available upon request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K															
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron							
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25												
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommended	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

# YG DREAM DRILLS - FLAT BOTTOM

## DH450 SERIES


### CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG

- VHM, DREAM DRILLS - FLACHBOHRER
- DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC
- PUNTE IN MD DREAM DRILLS, TESTA PIANA

- KURZ
- LONGUE
- LUNGA

- ▶ For holes on various angled surfaces.
- ▶ 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- ▶ Optimized flute shape for excellent chip evacuation.
- ▶ High strength cutting edge to improve tool life and versatility drilling.
- ▶ For through holes, minimized burrs at entrance and exit when drilling thin plate.
- ▶ CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- ▶ Pilot Drilling for 5XD

- ▶ Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- ▶ Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- ▶ Optimierte Nutenform für hervorragende Spanabfuhr.
- ▶ Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- ▶ Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- ▶ VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel mit Kühlkanalbohrungen
- ▶ Pilotbohren 5XD

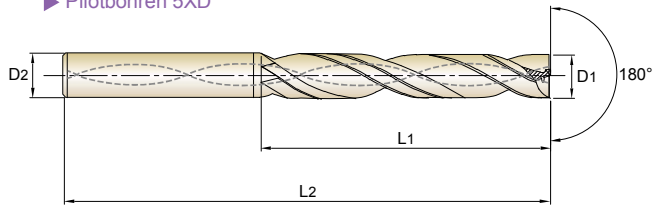


5 x D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450170	17.0	18	93	143
DH450175	17.5	18	93	143
DH450180	18.0	18	93	143
DH450185	18.5	20	101	153

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450190	19.0	20	101	153
DH450195	19.5	20	101	153
DH450200	20.0	20	101	153

▶ Other diameters and shank types are available upon request.



**Chamfer (Data as Below)**

**Double Margin (2XD Single Margin)**  
Hole Straightness and roundness provide good alignments

Drill Diameter (mm)	Corner Chamfer (mm)
Ø3.0 ~ Ø6.0	0.06
Ø6.1 ~ Ø10.0	0.12
Ø10.1 ~ Ø14.0	0.18
Ø14.1 ~ Ø20.0	0.26

◎ : Excellent ○ : Good

ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	○	○	◎	○	○	○		○				◎	○						
ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	○	○																				


**DPP447 SERIES**

**without COOLANT HOLES (2XD)**

RPM = rev./min.  
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)								
					3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	1	Non-alloy steel	80	RPM FEED	8490 0.02-0.05	6370 0.03-0.07	5090 0.03-0.08	4240 0.04-0.10	3180 0.08-0.14	2550 0.11-0.17	2120 0.11-0.21	1590 0.18-0.28	1270 0.28-0.38
	2		80	RPM FEED	8490 0.02-0.05	6370 0.03-0.07	5090 0.03-0.08	4240 0.04-0.10	3180 0.08-0.14	2550 0.11-0.17	2120 0.11-0.21	1590 0.18-0.28	1270 0.28-0.38
	3		70	RPM FEED	7430 0.02-0.05	5570 0.03-0.07	4460 0.03-0.08	3710 0.04-0.10	2790 0.07-0.13	2230 0.11-0.17	1860 0.11-0.21	1390 0.18-0.28	1110 0.24-0.34
	4		40	RPM FEED	4240 0.02-0.05	3180 0.03-0.07	2550 0.03-0.08	2120 0.04-0.10	1590 0.07-0.13	1270 0.11-0.17	1060 0.11-0.21	800 0.18-0.28	640 0.24-0.34
	5		38	RPM FEED	4030 0.02-0.05	3020 0.02-0.06	2420 0.03-0.08	2020 0.03-0.09	1510 0.06-0.12	1210 0.09-0.15	1010 0.08-0.18	760 0.14-0.24	600 0.21-0.31
	6	Low alloy steel	45	RPM FEED	4770 0.02-0.05	3580 0.03-0.07	2860 0.03-0.08	2390 0.04-0.10	1790 0.07-0.13	1430 0.11-0.17	1190 0.11-0.21	900 0.18-0.28	720 0.24-0.34
	7		40	RPM FEED	4240 0.02-0.05	3180 0.03-0.07	2550 0.03-0.08	2120 0.04-0.10	1590 0.07-0.13	1270 0.11-0.17	1060 0.11-0.21	800 0.18-0.28	640 0.24-0.34
	8		38	RPM FEED	4030 0.02-0.05	3020 0.02-0.06	2420 0.03-0.08	2020 0.03-0.09	1510 0.06-0.12	1210 0.09-0.15	1010 0.08-0.18	760 0.14-0.24	600 0.21-0.31
	9		25	RPM FEED	2650 0.01-0.03	1990 0.02-0.04	1590 0.02-0.05	1330 0.03-0.06	990 0.03-0.08	800 0.05-0.10	660 0.06-0.12	500 0.06-0.16	400 0.10-0.20
	10		High alloyed steel, and tool steel										
	11												
M	12	Stainless steel	30	RPM FEED	3180 0.01-0.03	2390 0.01-0.03	1910 0.02-0.04	1590 0.02-0.05	1190 0.03-0.06	950 0.03-0.08	800 0.05-0.10	600 0.06-0.12	480 0.09-0.15
	13												
	14												
K	15	Grey cast iron	70	RPM FEED	7430 0.02-0.05	5570 0.02-0.06	4460 0.03-0.08	3710 0.03-0.09	2790 0.06-0.12	2230 0.09-0.15	1860 0.08-0.18	1390 0.14-0.24	1110 0.20-0.30
	16		60	RPM FEED	6370 0.02-0.05	4770 0.02-0.05	3820 0.03-0.06	3180 0.03-0.07	2390 0.04-0.10	1910 0.07-0.13	1590 0.06-0.16	1190 0.11-0.21	950 0.15-0.25
	17	Nodular cast iron											
	18	Malleable cast iron											
	19												
20													
N	21	Aluminum- wrought alloy	165	RPM FEED	17510 0.02-0.05	13130 0.04-0.08	10500 0.04-0.10	8750 0.06-0.12	6570 0.10-0.16	5250 0.14-0.20	4380 0.14-0.24	3280 0.22-0.32	2630 0.30-0.40
	22		165	RPM FEED	17510 0.02-0.05	13130 0.04-0.08	10500 0.04-0.10	8750 0.06-0.12	6570 0.10-0.16	5250 0.14-0.20	4380 0.14-0.24	3280 0.22-0.32	2630 0.30-0.40
	23	Aluminum-cast, alloyed											
	24												
	25												
	26												
	27	Copper and Copper Alloys (Bronze / Brass)											
	28												
	29												
	30	Non Metallic Materials											
S	31	Heat Resistant Super Alloys											
	32												
	33												
	34												
	35	Titanium Alloys											
	36												
	37												
H	38	Hardened steel											
	39												
	40		Chilled Cast Iron										
41	Hardened Cast Iron												

Surface Angle	Cutting Conditions	
	RPM	FEED
0° ~ 15°	100%	100%
15° ~ 30°	100%	50%
30° ~	70%	30%

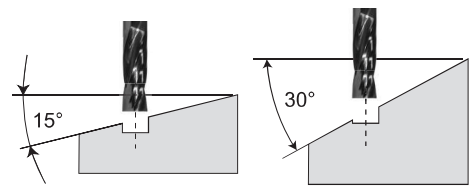

- ▶ The cutting conditions are for 2xD.
- ▶ A rigid and precise machine and holder are required.
- ▶ The recommended depth of hole is measured from the highest point of the hole on drilling in inclined and angled surfaces.
- ▶ The recommended cutting conditions are those for drilling on flat and horizontal surfaces.
- ▶ Please adjust feed rate according to the above surface angle when drilling on an inclined surface.
  - The recommended feed rate 50% or lower, in case of 15°~30° of the incline angle.
  - The recommended feed rate 30% or lower and RPM 70%, in case of 30° ~ of the incline angle.
- ▶ Please decrease cutting speed as material hardness increases.
- ▶ Only use drilling tools. Side milling, traversing, helical milling are not usable.



# DREAM DRILLS - FLAT BOTTOM


## RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

### DH450 SERIES

with COOLANT HOLES (5XD)


RPM = rev./min.  
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)								
					3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	1	Non-alloy steel	100	RPM FEED	10610 0.05-0.09	7960 0.08-0.12	6370 0.09-0.15	5310 0.12-0.18	3980 0.18-0.24	3180 0.24-0.30	2650 0.26-0.36	1990 0.38-0.48	1590 0.50-0.60
	2		90	RPM FEED	9550 0.02-0.05	7160 0.04-0.08	5730 0.04-0.10	4770 0.06-0.12	3580 0.10-0.16	2860 0.14-0.20	2390 0.14-0.24	1790 0.22-0.32	1430 0.30-0.40
	3		90	RPM FEED	9550 0.02-0.05	7160 0.04-0.08	5730 0.04-0.10	4770 0.06-0.12	3580 0.10-0.16	2860 0.14-0.20	2390 0.14-0.24	1790 0.22-0.32	1430 0.30-0.40
	4		75	RPM FEED	7960 0.02-0.04	5970 0.03-0.06	4770 0.05-0.08	3980 0.05-0.09	2980 0.06-0.12	2390 0.09-0.15	1990 0.08-0.18	1490 0.14-0.24	1190 0.20-0.30
	5		75	RPM FEED	7960 0.02-0.04	5970 0.03-0.06	4770 0.05-0.08	3980 0.05-0.09	2980 0.06-0.12	2390 0.09-0.15	1990 0.08-0.18	1490 0.14-0.24	1190 0.20-0.30
	6	Low alloy steel	85	RPM FEED	9020 0.02-0.05	6760 0.04-0.08	5410 0.04-0.10	4510 0.06-0.12	3380 0.10-0.16	2710 0.14-0.20	2250 0.14-0.24	1690 0.22-0.32	1350 0.30-0.40
	7		75	RPM FEED	7960 0.02-0.05	5970 0.04-0.08	4770 0.04-0.10	3980 0.06-0.12	2980 0.10-0.16	2390 0.14-0.20	1990 0.14-0.24	1490 0.22-0.32	1190 0.30-0.40
	8		75	RPM FEED	7960 0.02-0.04	5970 0.03-0.06	4770 0.05-0.08	3980 0.05-0.09	2980 0.06-0.12	2390 0.09-0.15	1990 0.08-0.18	1490 0.14-0.24	1190 0.20-0.30
	9		50	RPM FEED	5310 0.02-0.04	3980 0.03-0.06	3180 0.05-0.08	2650 0.05-0.09	1990 0.06-0.12	1590 0.09-0.15	1330 0.08-0.18	990 0.14-0.24	800 0.20-0.30
	10		High alloyed steel, and tool steel										
11													
M	12	Stainless steel	60	RPM FEED	6370 0.02-0.05	4770 0.04-0.08	3820 0.04-0.10	3180 0.06-0.12	2390 0.10-0.16	1910 0.14-0.20	1590 0.14-0.24	1190 0.22-0.32	950 0.30-0.40
	13												
	14												
K	15	Grey cast iron	90	RPM FEED	9550 0.02-0.05	7160 0.03-0.06	5730 0.05-0.08	4770 0.05-0.09	3580 0.06-0.12	2860 0.09-0.15	2390 0.08-0.18	1790 0.14-0.24	1430 0.20-0.30
	16		75	RPM FEED	7960 0.02-0.05	5970 0.02-0.05	4770 0.03-0.06	3980 0.03-0.07	2980 0.04-0.10	2390 0.07-0.13	1990 0.06-0.16	1490 0.11-0.21	1190 0.15-0.25
	17	Nodular cast iron											
	18												
	19	Malleable cast iron											
20													
N	21	Aluminum-wrought alloy	160	RPM FEED	16980 0.05-0.09	12730 0.08-0.12	10190 0.09-0.15	8490 0.12-0.18	6370 0.18-0.24	5090 0.24-0.30	4240 0.26-0.36	3180 0.38-0.48	2550 0.50-0.60
	22		160	RPM FEED	16980 0.05-0.09	12730 0.08-0.12	10190 0.09-0.15	8490 0.12-0.18	6370 0.18-0.24	5090 0.24-0.30	4240 0.26-0.36	3180 0.38-0.48	2550 0.50-0.60
	23	Aluminum-cast, alloyed											
	24												
	25												
	26												
	27	Copper and Copper Alloys (Bronze / Brass)											
	28												
	29	Non Metallic Materials											
	30												
S	31	Heat Resistant Super Alloys											
	32												
	33												
	34												
	35												
	36	Titanium Alloys											
	37												
H	38	Hardened steel											
	39												
	40	Chilled Cast Iron											
	41	Hardened Cast Iron											

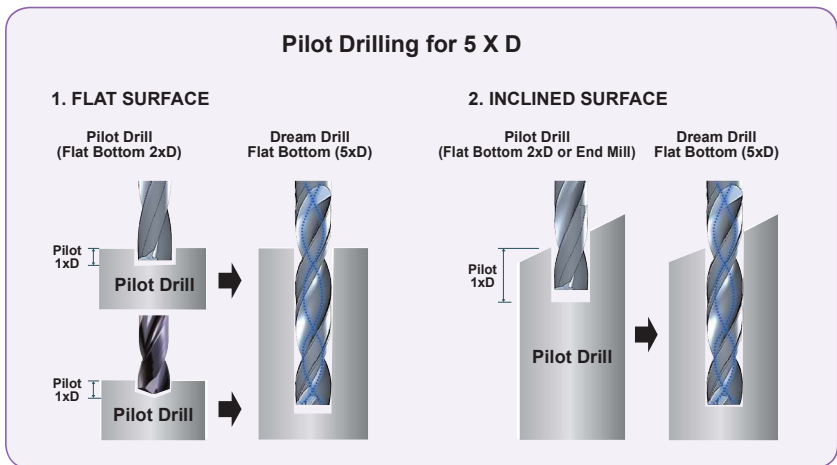


- ▶ For Flat bottom 5xD drilling depth, Slope surface needs Pilot Drilling with YG-1 Flat Bottom Drill (2XD) and Flat surface needs Pilot Drilling with YG-1 Dream Drill General.
- ▶ Pilot Drilling Depth : around 1XD
- ▶ Pilot Drilling Diameter : same size diameter


**VARIETY OF DRILLING  
Arten von Bohrungen**

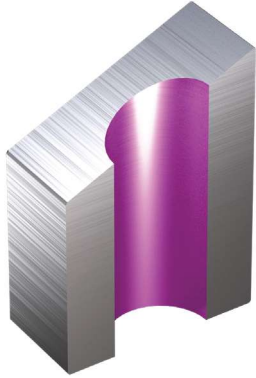


Inclined Entry

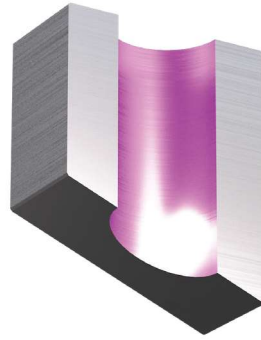

Inclined Exit




Counter Boring

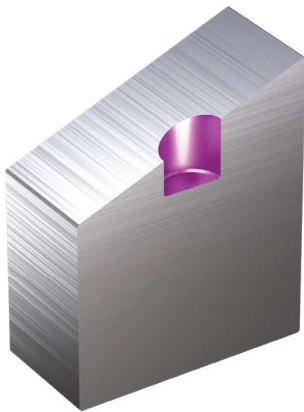


Guide Drilling




Cross Drilling

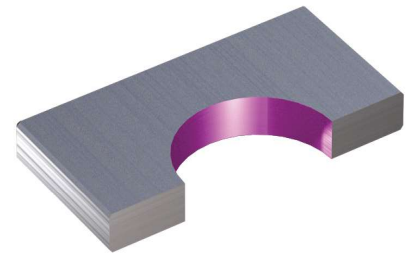


Thin Plate



Curved Surface

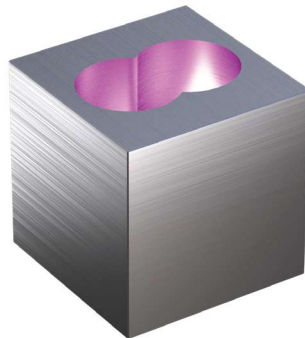

Chained Hole

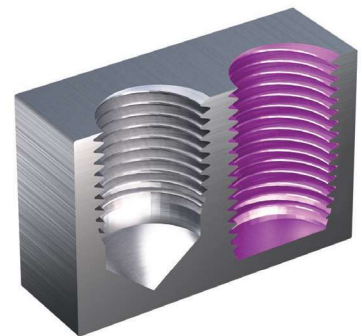

Blind Hole for Threading