

# YG STRAIGHT SHANK DRILLS

## D2105 SERIES

### HSSCo8, STRAIGHT SHANK TWIST DRILLS


JOBBER

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

KURZ  
COURTE  
CORTA

► **Surface treatment** : Coloring(Gold color)  
 ► **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)  
 ► **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

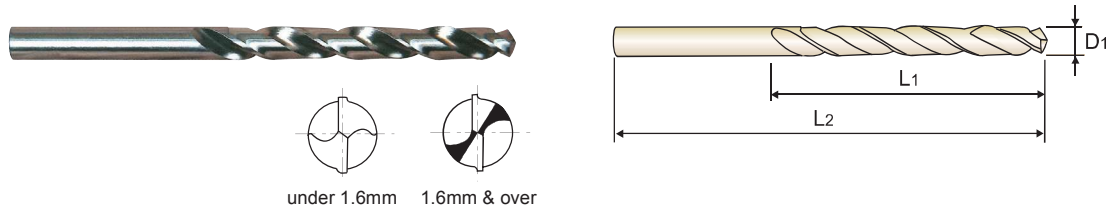

DIN 338
HSS Co8
33°
h8
135°
P.276-277

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D2105010	1.0	12	34
D2105011	1.1	14	36
D2105012	1.2	16	38
D2105912	1.25	16	38
D2105013	1.3	16	38
D2105014	1.4	18	40
D2105015	1.5	18	40
D2105016	1.6	20	43
D2105017	1.7	20	43
D2105917	1.75	22	46
D2105018	1.8	22	46
D2105019	1.9	22	46
D2105020	2.0	24	49
D2105021	2.1	24	49
D2105022	2.2	27	53
D2105922	2.25	27	53
D2105023	2.3	27	53
D2105024	2.4	30	57
D2105025	2.5	30	57
D2105026	2.6	30	57
D2105027	2.7	33	61
D2105927	2.75	33	61
D2105028	2.8	33	61
D2105029	2.9	33	61
D2105030	3.0	33	61
D2105031	3.1	36	65

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D2105032	3.2	36	65
D2105932	3.25	36	65
D2105033	3.3	36	65
D2105034	3.4	39	70
D2105035	3.5	39	70
D2105036	3.6	39	70
D2105037	3.7	39	70
D2105937	3.75	39	70
D2105038	3.8	43	75
D2105039	3.9	43	75
D2105040	4.0	43	75
D2105041	4.1	43	75
D2105042	4.2	43	75
D2105942	4.25	43	75
D2105043	4.3	47	80
D2105044	4.4	47	80
D2105045	4.5	47	80
D2105046	4.6	47	80
D2105047	4.7	47	80
D2105947	4.75	47	80
D2105048	4.8	52	86
D2105049	4.9	52	86
D2105050	5.0	52	86
D2105051	5.1	52	86
D2105052	5.2	52	86
D2105952	5.25	52	86

► TIN(D4105), TICN(D7105) and TIAN(DQ105) are available on your request.

► NEXT PAGE

ISO Material Description	P										M					K									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRc	13	25	28	32	300	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230					
Recommended	⊙	⊙	⊙	○	○	⊙	○	○	○	○	○	⊙	○	○	○	○	○	○	○	○					
ISO Material Description	N										S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41				
HRc											15	30	25	38	34			55	60	42	55				
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550				
Recommended	○	○	○						○							○									

◎ : Excellent ○ : Good

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA



# STRAIGHT SHANK DRILLS

**D2105** SERIES

## HSSCo8, STRAIGHT SHANK TWIST DRILLS

**JOBBER**

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8


**KURZ**  
**COURTE**  
**CORTA**

▶ **Surface treatment** : Coloring(Gold color)  
▶ **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

▶ **Oberflächenbehandlung** : Coloring(Goldfarbe)  
▶ **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.



under 1.6mm 1.6mm & over

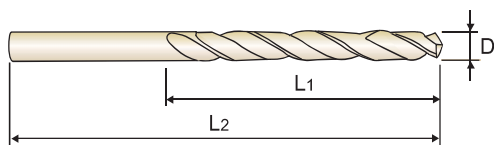

DIN 338
HSS Co8
33°
h8
135°
P.276-277

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2105053	5.3	52	86	D2105075	7.5	69	109
D2105054	5.4	57	93	D2105076	7.6	75	117
D2105055	5.5	57	93	D2105077	7.7	75	117
D2105056	5.6	57	93	D2105977	7.75	75	117
D2105057	5.7	57	93	D2105078	7.8	75	117
D2105957	5.75	57	93	D2105079	7.9	75	117
D2105058	5.8	57	93	D2105080	8.0	75	117
D2105059	5.9	57	93	D2105081	8.1	75	117
D2105060	6.0	57	93	D2105082	8.2	75	117
D2105061	6.1	63	101	D2105982	8.25	75	117
D2105062	6.2	63	101	D2105083	8.3	75	117
D2105962	6.25	63	101	D2105084	8.4	75	117
D2105063	6.3	63	101	D2105085	8.5	75	117
D2105064	6.4	63	101	D2105086	8.6	81	125
D2105065	6.5	63	101	D2105087	8.7	81	125
D2105066	6.6	63	101	D2105987	8.75	81	125
D2105067	6.7	63	101	D2105088	8.8	81	125
D2105967	6.75	69	109	D2105089	8.9	81	125
D2105068	6.8	69	109	D2105090	9.0	81	125
D2105069	6.9	69	109	D2105091	9.1	81	125
D2105070	7.0	69	109	D2105092	9.2	81	125
D2105071	7.1	69	109	D2105992	9.25	81	125
D2105072	7.2	69	109	D2105093	9.3	81	125
D2105972	7.25	69	109	D2105094	9.4	81	125
D2105073	7.3	69	109	D2105095	9.5	81	125
D2105074	7.4	69	109	D2105096	9.6	87	133

▶ TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	○	○	○	○	○	◎	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○						○							○					



# STRAIGHT SHANK DRILLS

**D2105** SERIES

## HSSCo8, STRAIGHT SHANK TWIST DRILLS


**JOBBER**

- HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSSCo8, queue cylindrique, Forme C, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8


**KURZ  
COURTE  
CORTA**

► **Surface treatment** : Coloring(Gold color)  
 ► **Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

► **Oberflächenbehandlung** : Coloring(Goldfarbe)  
 ► **Verwendung** : Zum Bohren von rostfreien und austenitischen. Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.



under 1.6mm 1.6mm & over

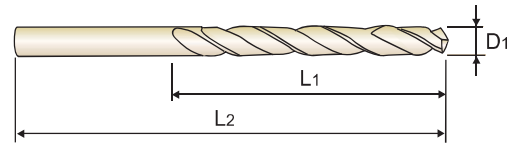

DIN 338
HSS Co8
33°
h8
135°
P.276-277

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D2105097	9.7	87	133
D2105997	9.75	87	133
D2105098	9.8	87	133
D2105099	9.9	87	133
D2105100	10.0	87	133
D2105102	10.2	87	133
D2105105	10.5	87	133
D2105110	11.0	94	142
D2105115	11.5	94	142
D2105120	12.0	101	151
D2105125	12.5	101	151
D2105130	13.0	101	151
D2105135	13.5	108	160

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D2105140	14.0	108	160
D2105145	14.5	114	169
D2105150	15.0	114	169
D2105155	15.5	120	178
D2105160	16.0	120	178
D2105165	16.5	125	184
D2105170	17.0	125	184
D2105175	17.5	130	191
D2105180	18.0	130	191
D2105185	18.5	135	198
D2105190	19.0	135	198
D2105195	19.5	140	205
D2105200	20.0	140	205

► TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

ISO Material Description	P										M					K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel			Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	○	○	○	○	○	○	○	○		
ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallics		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	○	○	○						○							○						

◎ : Excellent ○ : Good



# STRAIGHT SHANK DRILLS

## RECOMMENDED CUTTING CONDITIONS EMPFOLHENE SCHNEIDPARAMETER

**D2107, D1107, D2105, DL105, D1105, D1125, D2104, D1121, DL109** SERIES

**HSS, HSS-E & HSSCo8  
COBALT DRILLS**

RPM = rev./min.  
FEED = mm/rev.

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)					
					2.0	3.0	4.0	6.0	8.0	
P	1	Non-alloy steel	30	RPM FEED	4770 0.02~0.04	3180 0.03~0.05	2390 0.04~0.06	1590 0.05~0.08	1190 0.10~0.13	
	2		25	RPM FEED	3980 0.02~0.04	2650 0.03~0.05	1990 0.04~0.06	1330 0.05~0.08	990 0.10~0.13	
	3		20	RPM FEED	3180 0.02~0.04	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.10~0.13	
	4		20	RPM FEED	3180 0.01~0.02	2120 0.01~0.03	1590 0.02~0.04	1060 0.02~0.05	800 0.03~0.06	
	5									
	6	Low alloy steel	25	RPM FEED	3980 0.02~0.04	2650 0.03~0.05	1990 0.04~0.06	1330 0.05~0.08	990 0.10~0.13	
	7		20	RPM FEED	3180 0.02~0.04	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.10~0.13	
	8		20	RPM FEED	3180 0.01~0.02	2120 0.01~0.03	1590 0.02~0.04	1060 0.02~0.05	800 0.03~0.06	
	9									
	10		High alloyed steel, and tool steel	15	RPM FEED	2390 0.02~0.04	1590 0.03~0.05	1190 0.04~0.06	800 0.05~0.08	600 0.10~0.13
	11									
M	12	Stainless steel	20	RPM FEED	3180 0.02~0.04	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.10~0.13	
	13		15	RPM FEED	2390 0.02~0.04	1590 0.03~0.05	1190 0.04~0.06	800 0.05~0.08	600 0.10~0.13	
	14		10	RPM FEED	1590 0.01~0.02	1060 0.01~0.03	800 0.02~0.04	530 0.02~0.05	400 0.03~0.06	
K	15	Grey cast iron	30	RPM FEED	4770 0.02~0.04	3180 0.03~0.05	2390 0.04~0.06	1590 0.05~0.08	1190 0.10~0.13	
	16		25	RPM FEED	3980 0.01~0.02	2650 0.01~0.03	1990 0.02~0.04	1330 0.02~0.05	990 0.03~0.06	
	17	Nodular cast iron	30	RPM FEED	4770 0.02~0.04	3180 0.03~0.05	2390 0.04~0.06	1590 0.05~0.08	1190 0.10~0.13	
	18									
	19	Malleable cast iron	25	RPM FEED	3980 0.02~0.04	2650 0.03~0.05	1990 0.04~0.06	1330 0.05~0.08	990 0.10~0.13	
20										
N	21	Aluminum-wrought alloy	55	RPM FEED	8750 0.03~0.06	5840 0.05~0.09	4380 0.07~0.11	2920 0.12~0.16	2190 0.12~0.18	
	22		55	RPM FEED	8750 0.03~0.06	5840 0.05~0.09	4380 0.07~0.11	2920 0.12~0.16	2190 0.12~0.18	
	23	Aluminum-cast, alloyed	40	RPM FEED	6370 0.03~0.06	4240 0.05~0.09	3180 0.07~0.11	2120 0.12~0.16	1590 0.12~0.18	
	24									
	25									
	26									
	27		Copper and Copper Alloys (Bronze / Brass)							
28										
29	Non Metallic Materials	20	RPM FEED	3180 0.02~0.04	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.10~0.13		
30										
S	31	Heat Resistant Super Alloys								
	32									
	33									
	34									
	35									
	36	Titanium Alloys	10	RPM FEED	1590 0.01~0.03	1060 0.02~0.04	800 0.03~0.05	530 0.04~0.07	400 0.05~0.08	
	37									
H	38	Hardened steel								
	39									
	40		Chilled Cast Iron							
	41			Hardened Cast Iron						



# STRAIGHT SHANK DRILLS

## RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

HSS

RPM = rev./min.  
FEED = mm/rev.

VDI 3323	Parameter	Drill Diameter (mm)					
		10.0	13.0	16.0	18.0	20.0	30.0
1	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
2	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
3	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
4	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
5							
6	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
7	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
8	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
9							
10	RPM	480	370	300	270	240	160
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
11							
12	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
13	RPM	480	370	300	270	240	160
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
14	RPM	320	240	200	180	160	110
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
15	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
16	RPM	800	610	500	440	400	270
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
17	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
18							
19	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
20							
21	RPM	1750	1350	1090	970	880	580
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
22	RPM	1750	1350	1090	970	880	580
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
23	RPM	1270	980	800	710	640	420
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
24							
25							
26							
27							
28							
29	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
30							
31							
32							
33							
34							
35							
36	RPM	320	240	200	180	160	110
	FEED	0.05~0.09	0.06~0.10	0.05~0.11	0.06~0.12	0.09~0.13	0.12~0.18
37							
38							
39							
40							
41							

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA