


CARBIDE, 2 FLUTE 45° HELIX LONG LENGTH

● VOLLHARTMETALL, 2 SCHNEIDEN 45° RECHTSSPIRALE LANG
 () Fraise carbure, 2 dents, hélice 45°, longue
 () 2 TAGLIANTI, ELICA 45°, SERIE LUNGA

- ▶ Suitable for high speed machining in aluminum and other non-ferrous materials
- ▶ Mirror surface - Excellent surface finish
- ▶ Superior chip evacuation
- ▶ Reduces chipping of corner edges

- ▶ Zur HSC- Bearbeitung von Aluminium und anderen Nichteisenmetallen.
- ▶ Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.
- ▶ Überlegene Spanabfuhr
- ▶ Reduzierung von Schneideckenausbrüchen.


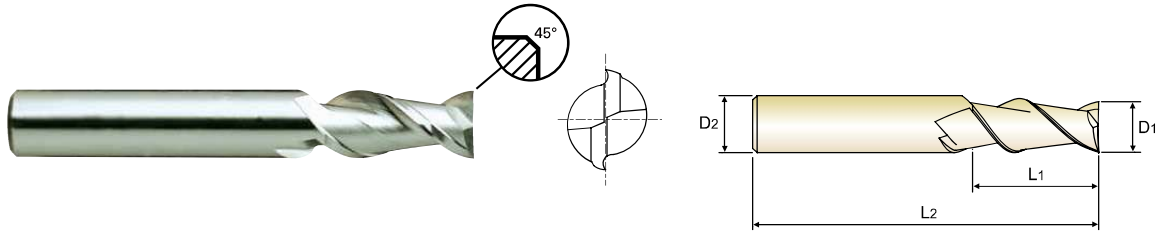


Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
E5522030	E5521030	3.0	6	8	57	0.05
E5522040	E5521040	4.0	6	11	57	0.05
E5522050	E5521050	5.0	6	13	57	0.05
E5522060	E5521060	6.0	6	13	57	0.05
E5522080	E5521080	8.0	8	19	63	0.05
E5522100	E5521100	10.0	10	22	72	0.10
E5522120	E5521120	12.0	12	26	83	0.10
E5522140	E5521140	14.0	14	26	83	0.10
E5522160	E5521160	16.0	16	32	92	0.10
E5522180	E5521180	18.0	18	32	92	0.10
E5522200	E5521200	20.0	20	38	104	0.10

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.015	h5

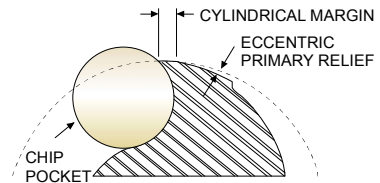

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323																					
HRC																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					
ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRC																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	○																

E5E47 SERIES

1 FLUTE - SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)							
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
N	21~22	Aluminum-wrought alloy	1.0D	1.5D	Vc	145	170	190	190	190	195	190	190
					fz	0.065	0.094	0.120	0.150	0.180	0.244	0.333	0.440
					RPM	23077	18038	15120	12096	10080	7759	6048	5040
N	23~24	Aluminum-cast, alloyed	1.0D	1.5D	Vc	94	111	124	124	124	127	124	124
					fz	0.065	0.094	0.120	0.150	0.180	0.244	0.333	0.440
					RPM	15000	11724	9828	7862	6552	5043	3931	3276
N	29.1	Non Metallic Materials (Duroplastic)	1.0D	1.5D	Vc	200	235	250	235	255	250	250	255
					fz	0.069	0.096	0.120	0.147	0.170	0.240	0.300	0.343
					RPM	31831	24934	19894	14961	13528	9947	7958	6764
					FEED	2196	2394	2387	2199	2300	2387	2387	2320



E5E48, E5522, E5521 SERIES

2 FLUTE - SLOTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)										
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0
N	21~22	Aluminum-wrought alloy	1.0D	0.5D	Vc	95	125	155	190	200	250	300	265	300	225	250
					fz	0.035	0.045	0.050	0.060	0.088	0.106	0.131	0.150	0.158	0.175	0.200
					RPM	10080	9947	9868	10080	7958	7958	7958	6025	5968	3979	3979
N	23~24	Aluminum-cast, alloyed	1.0D	0.5D	Vc	62	81	101	124	130	163	195	172	195	146	163
					fz	0.035	0.045	0.050	0.060	0.088	0.106	0.131	0.150	0.158	0.175	0.200
					RPM	6552	6466	6414	6552	5173	5173	5173	3916	3879	2586	2586
					FEED	459	582	641	786	910	1097	1355	1175	1226	905	1035

2 FLUTE - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)										
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0
N	21~22	Aluminum-wrought alloy	Ø3~Ø10=0.25D Ø12~Ø20=0.5D	1.0D	Vc	95	125	155	190	200	250	300	265	300	225	250
					fz	0.045	0.055	0.065	0.075	0.113	0.131	0.163	0.183	0.200	0.225	0.238
					RPM	10080	9947	9868	10080	7958	7958	7958	6025	5968	3979	3979
N	23~24	Aluminum-cast, alloyed	Ø3~Ø10=0.25D Ø12~Ø20=0.5D	1.0D	Vc	62	81	101	124	130	163	195	172	195	146	163
					fz	0.045	0.055	0.065	0.075	0.113	0.131	0.163	0.183	0.200	0.225	0.238
					RPM	6552	6466	6414	6552	5173	5173	5173	3916	3879	2586	2586
					FEED	590	711	834	983	1169	1355	1686	1433	1552	1164	1231

