


UNF Unified Fine Threads

X-COATED HSS-PM SPIRAL POINT TAPS FOR MULTI-PURPOSE

TRJ18 SERIES



- ▶ High performance in various ductile materials
- ▶ Specially designed to prevent oversized threads and reduce gauging problems



Machine Taps

Unit : mm

SIZE	TPI	ECP No.	Thread Length		Overall Length	Neck Length		Shank Diameter ϕD_2	Square Size	Square Length	Square Key	No. of Flute	Tapping Drill Diameter	
			L ₁	L ₂		L ₃	K						Z	ϕd_1
#4 - 48 UNF		TRJ18182GS	11.0	56.0	18.0	3.5	2.7	6.0	2.40			2		
#5 - 44 UNF		TRJ18222GS	11.0	56.0	18.0	3.5	2.7	6.0	3			3		2.70
#6 - 40 UNF		TRJ18262GS	12.0	56.0	20.0	4.0	3.0	6.0	2.90			3		2.90
#8 - 36 UNF		TRJ18302GS	13.0	63.0	21.0	4.5	3.4	6.0	3.50			3		3.50
#10 - 32 UNF		TRJ18342GS	15.0	70.0	25.0	6.0	4.9	8.0	3			3		4.10
#12 - 28 UNF		TRJ18382GS	16.0	80.0	30.0	6.0	4.9	8.0	4.60			3		4.60
1/4 - 28 UNF		TRJ18422GS	17.0	80.0	30.0	7.0	5.5	8.0	3			3		5.50
5/16 - 24 UNF		TRJ18462GS	17.0	90.0	35.0	8.0	6.2	9.0	3			3		6.90
3/8 - 24 UNF		TRJ18502GS	18.0	100.0	39.0	9.0	7.0	10.0	3			3		8.50
7/16 - 20 UNF		TRJ18542GS	22.0	100.0	40.0	8.0	6.2	9.0	3			3		9.90
1/2 - 20 UNF		TRJ18582GS	22.0	100.0	40.0	9.0	7.0	10.0	3			3		11.50
9/16 - 18 UNF		TRJ18622GS	22.0	100.0	40.0	11.0	9.0	12.0	3			3		12.90
5/8 - 18 UNF		TRJ18662GS	22.0	100.0	40.0	12.0	9.0	12.0	3			3		14.50
3/4 - 16 UNF		TRJ18722GS	25.0	110.0	44.0	14.0	11.0	14.0	3			3		17.50
7/8 - 14 UNF		TRJ18762GS	26.0	125.0	50.0	18.0	14.5	17.0	3			3		20.50
1" - 12 UNF		TRJ18802GS	28.0	140.0	54.0	20.0	16.0	19.0	3			3		23.20

▶ DIN371 (#4-3/8) and DIN374 (7/16-1)

ISO	Material																				
	Non-alloy steel			Low alloy steel			High alloy steel and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Mallicast cast iron						
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
V013323	13	25	28	32	35	38	40	42	45	48	50	52	55	58	60	63	66	69	72	75	
HfC	125	130	135	140	145	150	155	160	165	170	175	180	185	190	195	200	205	210	215	220	
Recommended	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
ISO	Material																				
Material Description	Aluminum-cast, wrought alloy				Aluminum-cast, Copper and Copper Alloys (Bronze / Brass)				Heat Resistant Super Alloys				Titanium Alloys								
V013323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HfC	60	100	75	90	130	110	90	100	100	15	30	25	35	34	400Rm	1050Rm	650	650	460	550	550
Recommended	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙

⊙ : Excellent ○ : Good



PRIME TAPS TECHNICAL DATA

- CUTTING SPEED TABLE
- RECOMMENDED TAP DRILL SIZE
- TAP TOLERANCES
- TROUBLE SHOOTING GUIDE


CASE STUDY

TEST III SPIRAL FLUTE TAP (M6x1.0)

Cutting Condition

Tool	Spiral Flute Tap
Size	M6x1.0
Work Material	JIS: SUS304 / DIN: X16CrNi1810 / WR: 1.4350
RPM	531 rev/min.
Vc	10 m/min.
Feed	531 mm/min.
Tap Drill Size	5.1mm
Tapping Depth	12 mm
Tapping Holes	YG-1: 1000+α / Competitor: 593
Coolant	Wet Cut

YG Prime Taps (1000 Holes+α)

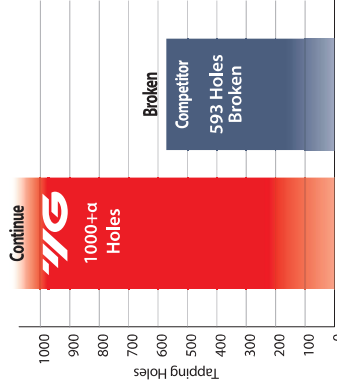


Competitor (593 Holes, Broken)



TEST IV SPIRAL FLUTE TAP (M8x1.25)

Cutting Condition

Tool	Spiral Flute Tap
Size	M8x1.25
Work Material	JIS: S45C / DIN: CK45 / WR: 1.1191
RPM	796 rev/min
Vc	20 m/min
Feed	995 mm/min
Tap Drill Size	6.8mm
Tapping Depth	17 mm
Tapping Holes	YG-1: 1350+α / Competitor: 1350+α
Coolant	Wet Cut

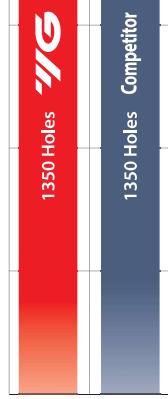

HSS-PM PRIME TAPS

Premium Spiral Point and Spiral Flute Taps
High Performance in Various Ductile Materials

HOLE TYPE	Max. 3.0xD Through Hole
TOOL MATERIAL	HSS-PM
CHAMFERED AC TO (D1) D17	C
FLUTE TYPE	Spiral Flute
SPIRAL FLUTE ANGLE	R45
FLUTE TYPE	R45
SPIRAL FLUTE ANGLE	TRJ15 (p.14)
MODEL	TRJ15 (p.14)
SERIES	TRJ16 (p.15)
	TRJ17 (p.17)
	TRJ18 (p.19)
	TRJ19 (p.21)
	TRJ20 (p.23)
	TRJ21 (p.25)
	TRJ22 (p.27)
	TRJ23 (p.29)
	TRJ24 (p.31)
	TRJ25 (p.33)
	TRJ26 (p.35)
	TRJ27 (p.37)
	TRJ28 (p.39)
	TRJ29 (p.41)
	TRJ30 (p.43)
	TRJ31 (p.45)
	TRJ32 (p.47)
	TRJ33 (p.49)
	TRJ34 (p.51)
	TRJ35 (p.53)
	TRJ36 (p.55)
	TRJ37 (p.57)
	TRJ38 (p.59)
	TRJ39 (p.61)
	TRJ40 (p.63)
	TRJ41 (p.65)
	TRJ42 (p.67)
	TRJ43 (p.69)
	TRJ44 (p.71)
	TRJ45 (p.73)
	TRJ46 (p.75)
	TRJ47 (p.77)
	TRJ48 (p.79)
	TRJ49 (p.81)
	TRJ50 (p.83)
	TRJ51 (p.85)
	TRJ52 (p.87)
	TRJ53 (p.89)
	TRJ54 (p.91)
	TRJ55 (p.93)
	TRJ56 (p.95)
	TRJ57 (p.97)
	TRJ58 (p.99)
	TRJ59 (p.101)
	TRJ60 (p.103)
	TRJ61 (p.105)
	TRJ62 (p.107)
	TRJ63 (p.109)
	TRJ64 (p.111)
	TRJ65 (p.113)
	TRJ66 (p.115)
	TRJ67 (p.117)
	TRJ68 (p.119)
	TRJ69 (p.121)
	TRJ70 (p.123)
	TRJ71 (p.125)
	TRJ72 (p.127)
	TRJ73 (p.129)
	TRJ74 (p.131)
	TRJ75 (p.133)
	TRJ76 (p.135)
	TRJ77 (p.137)
	TRJ78 (p.139)
	TRJ79 (p.141)
	TRJ80 (p.143)
	TRJ81 (p.145)
	TRJ82 (p.147)
	TRJ83 (p.149)
	TRJ84 (p.151)
	TRJ85 (p.153)
	TRJ86 (p.155)
	TRJ87 (p.157)
	TRJ88 (p.159)
	TRJ89 (p.161)
	TRJ90 (p.163)
	TRJ91 (p.165)
	TRJ92 (p.167)
	TRJ93 (p.169)
	TRJ94 (p.171)
	TRJ95 (p.173)
	TRJ96 (p.175)
	TRJ97 (p.177)
	TRJ98 (p.179)
	TRJ99 (p.181)
	TRJ100 (p.183)

Please visit global.yg1.com/mat for material search
 ◎ : Excellent ○ : Good

ISO 3233	VDI 3233	Material Description	Composition / Structure / Heat Treatment	HB	HRC	Recommended cutting conditions Vc (m/min)
1	1	Non-alloy steel	About 0.15% C Annealed	125		5-20 ◎
2	2	Non-alloy steel	About 0.45% C Annealed	190	13	10-50 ◎
3	3	Non-alloy steel	About 0.45% C Quenched & Tempered	250	25	10-50 ◎
4	4	Non-alloy steel	About 0.75% C Annealed	270	28	15-50 ◎
5	5	Low alloy steel	About 0.75% C Quenched & Tempered	300	32	15-40 ◎
6	6	Low alloy steel	About 0.75% C Annealed	180	10	8-30 ◎
7	7	Low alloy steel	Quenched & Tempered	275	29	8-30 ◎
8	8	Low alloy steel	Quenched & Tempered	300	32	8-30 ◎
9	9	High alloyed steel and tool steel	Quenched & Tempered	350	38	8-30 ○
10	10	High alloyed steel and tool steel	Annealed	200	15	8-30 ○
11	11	High alloyed steel and tool steel	Quenched & Tempered	325	35	8-30 ○
12	12	Stainless steel	Ferritic / Martensitic	200	15	5-15 ◎
13	13	Stainless steel	Annealed	240	23	5-15 ◎
14	14	Stainless steel	Quenched & Tempered	180	10	5-15 ◎
15	15	Grey cast iron	Pearlitic / ferritic	180	10	15-35 ○
16	16	Grey cast iron	Pearlitic (Martensitic)	260	26	15-35 ○
17	17	Nodular cast iron	Ferritic	160	3	15-35 ◎
18	18	Nodular cast iron	Pearlitic	250	25	15-35 ◎
19	19	Malleable cast iron	Ferritic	130		15-35 ◎
20	20	Malleable cast iron	Pearlitic	230	21	15-35 ◎
21	21	Aluminum-wrought alloy	Not Curable	60		15-35 ○
22	22	Aluminum-wrought alloy	Curable	70		15-35 ○
23	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	105		15-35 ○
24	24	Aluminum-cast, alloyed	≤ 12% Si, Curable	90		15-35 ◎
25	25	Copper and Copper Alloys	> 12% Si, Not Curable	130		15-35 ○
26	26	Copper and Copper Alloys	Cutting Alloys, PB-1 %	110		15-35 ○
27	27	Copper Alloys	(Bronze / Brass)	90		15-35 ○
28	28	Copper Alloys	CuZn, CuSnZn (Brass)	90		15-35 ◎
29	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic	100		15-35 ◎
30	30	Non Metallic Materials	Rubber, Wood, etc.			15-35 ◎
31	31	Heat Resistant Super Alloys	Fe Based	200	15	
32	32	Heat Resistant Super Alloys	Annealed	280	30	
33	33	Heat Resistant Super Alloys	Cured	250	25	
34	34	Heat Resistant Super Alloys	Ni or Co Based	350	38	
35	35	Heat Resistant Super Alloys	Cast	320	34	
36	36	Titanium Alloys	Pure Titanium	400 firm		
37	37	Titanium Alloys	Alpha + Beta Alloys	1050 firm		
38	38	Hardened steel	Hardened	550	55	
39	39	Chilled Cast Iron	Hardened	630	60	
40	40	Chilled Cast Iron	Cast	400	42	
41	41	Hardened Cast Iron	Hardened	550	55	