

B-RAD SELECT

B-RAD SELECT series torque wrenches offer high torque output and reliability combined with uncompromised cordless freedom.



B-RAD SELECT video

Up to 7.000 Nm

The B-RAD SELECT is now even more powerful, faster and lighter.


Cordless torque!

The B-RAD SELECT is especially suitable for installation and service jobs where electricity or compressed air are not available. Besides this, the B-RAD SELECT is also an ideal tool for valve actuation, load strapping and for driving spindles. The number of cycles per battery depends on stud length, lubrication and temperature.

- Brushless motor
- Automatic reaction arm release
- Available in single and automatic 2-speed gearbox
- Latest Lithium-ion 18V/5.2Ah battery technology.

All B-RAD tools include:

- Reaction arm and retaining ring
- Two 18V / 5.2 Ah Lithium-ion batteries with fast charger (18V/8.0 Ah optional)
- Calibration certificate
- Weatherproof storage case
- Safety instruction on USB drive
- User manual.

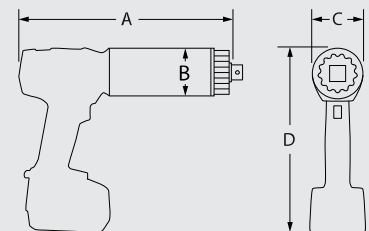

Toolkit Number	Tool Model	Drive size Inches	Torque (Nm)		Speed RPM	Weight Kg	Noise level dB	Dimensions (mm)			
			Min	Max				A	B	C	D
30213	B-RAD SELECT 275	1/2" or 3/4"	50	270	47	3,2	65	228	63	68	262
28264	B-RAD SELECT 700	3/4"	170	700	21	3,5	65	231	63	67	262
28266	B-RAD SELECT 1400	3/4"	300	1.400	10	3,5	65	231	63	67	262
28267	B-RAD SELECT 1400-2	3/4"	300	1.400	71	4,3	65	279	63	67	262
28268	B-RAD SELECT 2000	1"	400	2.000	6	4,0	65	244	69	69	262
28269	B-RAD SELECT 2000-2	1"	400	2.000	19	4,9	65	298	69	69	262
28270	B-RAD SELECT 4000	1"	800	4.000	3	6,0	65	285	81	81	266
28271	B-RAD SELECT 4000-2	1"	800	4.000	19	6,7	65	337	81	81	266
28272	B-RAD SELECT 7000	1 1/2"	1.400	7.000	2	8,8	65	295	95	95	272

Repeatability 3%